

ALL
BRITISH
COMPANY

**EXTENDED-HUB
ELECTROMAGNETIC
CLUTCHES**

**FOR PULLEY, CHAINWHEEL,
SPUR GEAR OR FLEXIBLE COUPLING**

**DATA
SHEET**



**SIZE
S250EH**

MAXIMUM STATIC TORQUE 5.6 Nm. 50 lb. ins.

EXTENDED HUB CLUTCHES

Advantages

- Ideal for use where an input or output drive is required to a shaft emerging from a machine side frame or casting.
- Rugged construction for long life.
- Through shaft mounting avoids need to align shafts.
- Offers a facility for use with a pulley or with a flexible coupling for in-line drive.
- Input drive may be to shaft or hub.

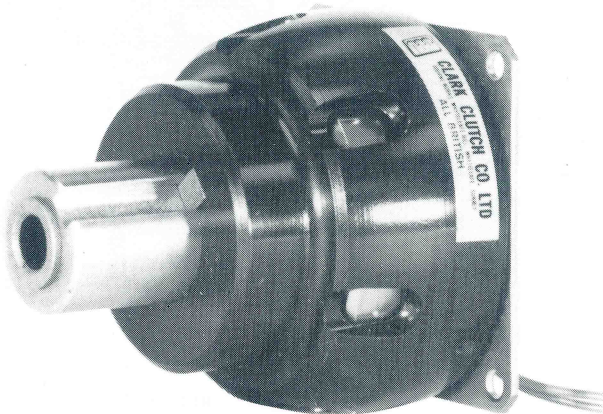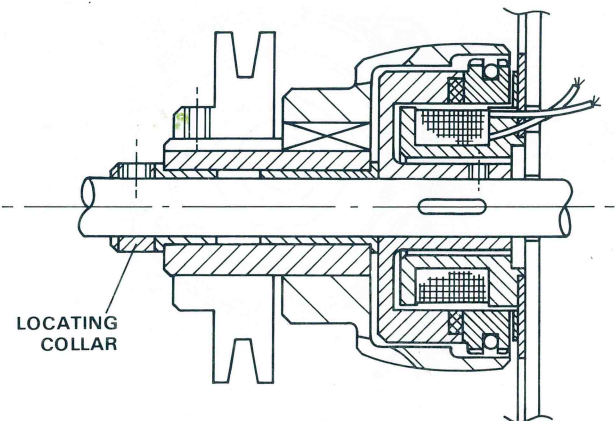

SELECTION TABLE

Allowing for 250% torque overloads after Clutch has brought load to full speed.

	SHAFT SPEED AT CLUTCH IN R.P.M.																	
Motor kW	100	200	300	400	500	600	700	800	900	1000	1250	1440	1750	2000	2500	2800	3000	4000
0.015	250	250	250	175	175	175	175	175	175	175	175	175	175	175	175	175	175	175
0.037	365	250	250	250	250	250	250	175	175	175	175	175	175	175	175	175	175	175
0.06	400	365	250	250	250	250	250	250	250	250	250	175	175	175	175	175	175	175
0.09	400	400	365	250	250	250	250	250	250	250	250	250	250	175	175	175	175	175
0.12	600	400	365	365	365	250	250	250	250	250	250	250	250	250	250	175	175	175
0.18	600	400	400	400	365	365	365	250	250	250	250	250	250	250	250	250	250	175
0.25	600	600	400	400	400	365	365	365	365	365	250	250	250	250	250	250	250	250
0.37	800	600	600	400	400	400	400	400	365	365	365	365	250	250	250	250	250	250
0.55	800	800	600	600	600	400	400	400	400	400	365	365	365	365	250	250	250	250
0.75		800	600	600	600	600	600	400	400	400	400	400	365	365	365	365	365	250
1.1		800	800	600	600	600	600	600	600	600	400	400	400	400	365	365	365	365
1.5			800	800	800	600	600	600	600	600	600	600	400	400	400	400	400	365
2.2				800	800	800	800	600	600	600	600	600	600	600	400	400	400	400
3.0							800	800	800	800	800	600	600	600	600	600	600	400
5.5											800	800	800	800	600	600	600	600
7.5												800	800	800	800	600	600	600
9.3													800	800	800	800	800	600
11.0														800	800	800	800	800

See S250 Clutch Data Sheet for full specification.

**DATA
SHEET**

SIZE


S250EH

**EXTENDED-HUB
ELECTROMAGNETIC
CLUTCHES**

**FOR PULLEY, CHAINWHEEL,
SPUR GEAR OR FLEXIBLE COUPLING**

ALL
BRITISH
COMPANY

Type S250EH (Consult S250 Clutch Data Sheet for details of field spool mounting).

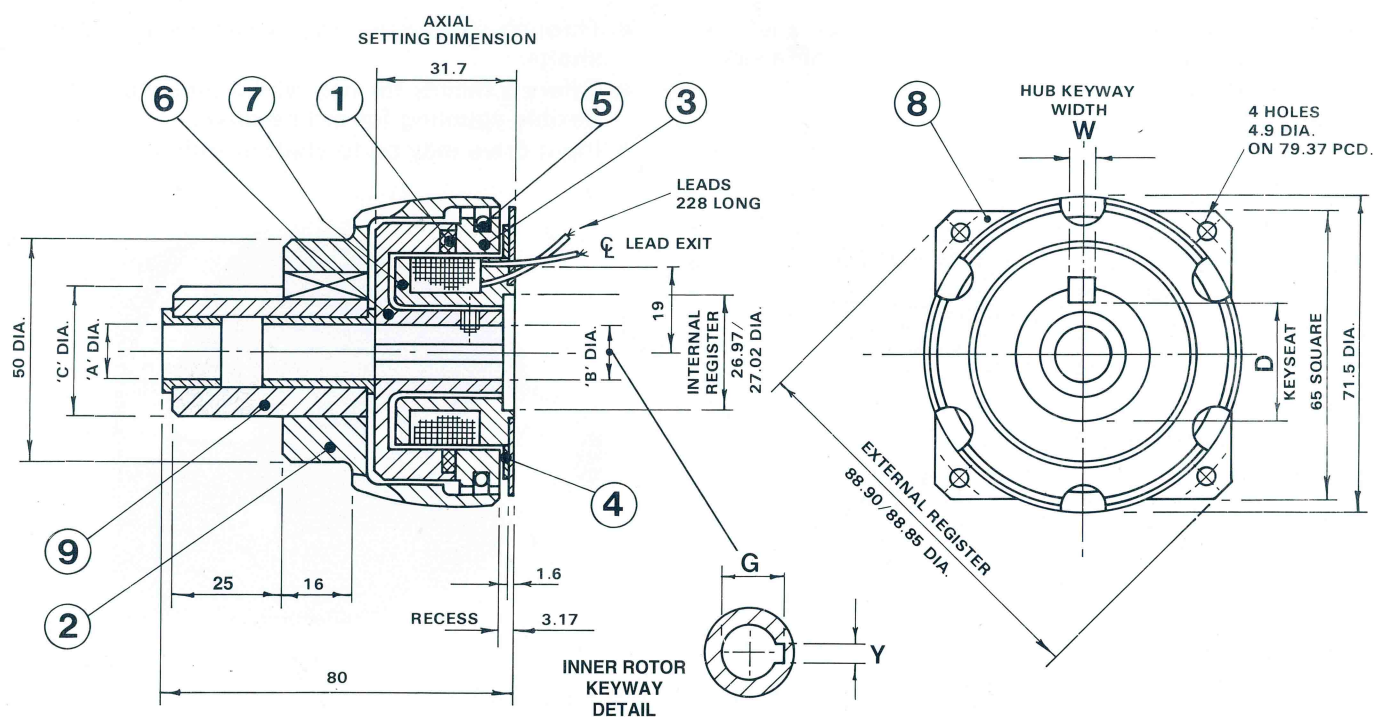

STANDARD BORES, HUB DIAMETERS & KEYWAYS

BEARING BORE A DIA.	B DIA.	INNER ROTOR KEYWAY		HUB DIA. C	HUB KEYWAY	
		Y	G		W	D
3/8"	.375"/.376"	.125"/.126"	.435"/.441"	1.0005"/ 1.0002"	.249"/ .250"	.858"/ .852"
1/2"	.500"/.501"	.125"/.126"	.561"/.567"	1.1255"/ 1.1252"	.249"/ .250"	.858"/ .852"

METRIC SIZES (mm)

BEARING BORE A DIA.	B DIA.	INNER ROTOR KEYWAY		HUB DIA. C	HUB KEYWAY	
		Y	G		W	D
8	8.00/8.03	1.99/2.00	9.03/9.13	25.00/ 24.99	4.00/3.97	22.50/ 22.40
9	9.00/9.03	3.00/3.02	10.43/10.53	28.00/ 27.99		25.50/ 25.40
10	10.00/10.03	3.00/3.02	11.43/11.53			
12	12.00/12.03	4.00/4.02	13.83/13.93			
14	14.00/14.03	5.00/5.02	14.09/15.00			

PARTS LIST

ITEM	PART No.	TITLE	
1	484	FRICTION LINING	
2	3245	EH OUTER MEMBER	
3	491	DRIVE RING	
4	566	MAGNETIC INSULATOR	
5	734	CUSHION RING	
6	479	INNER ROTOR	
7	478	FIELD SPOOL	
8	483	MOUNTING PLATE	
9	3246	EH SLEEVE & BEARING SUB-ASSY.	

CLARK ELECTRIC CLUTCH AND CONTROLS Ltd

28 Victory Park, Trident Close, Medway City Estate, Rochester, Kent, ME2 4ER
Tel.: +44 (0)1634 297408 Fax.: +44 (0)1634 739136 e-mail: sales@clarkelectric.co.uk